


# DeepVNA 101 / NanoVNA-F Quick start guide - FW 1.0.5

By: BH5HNU  
Date: 20221028

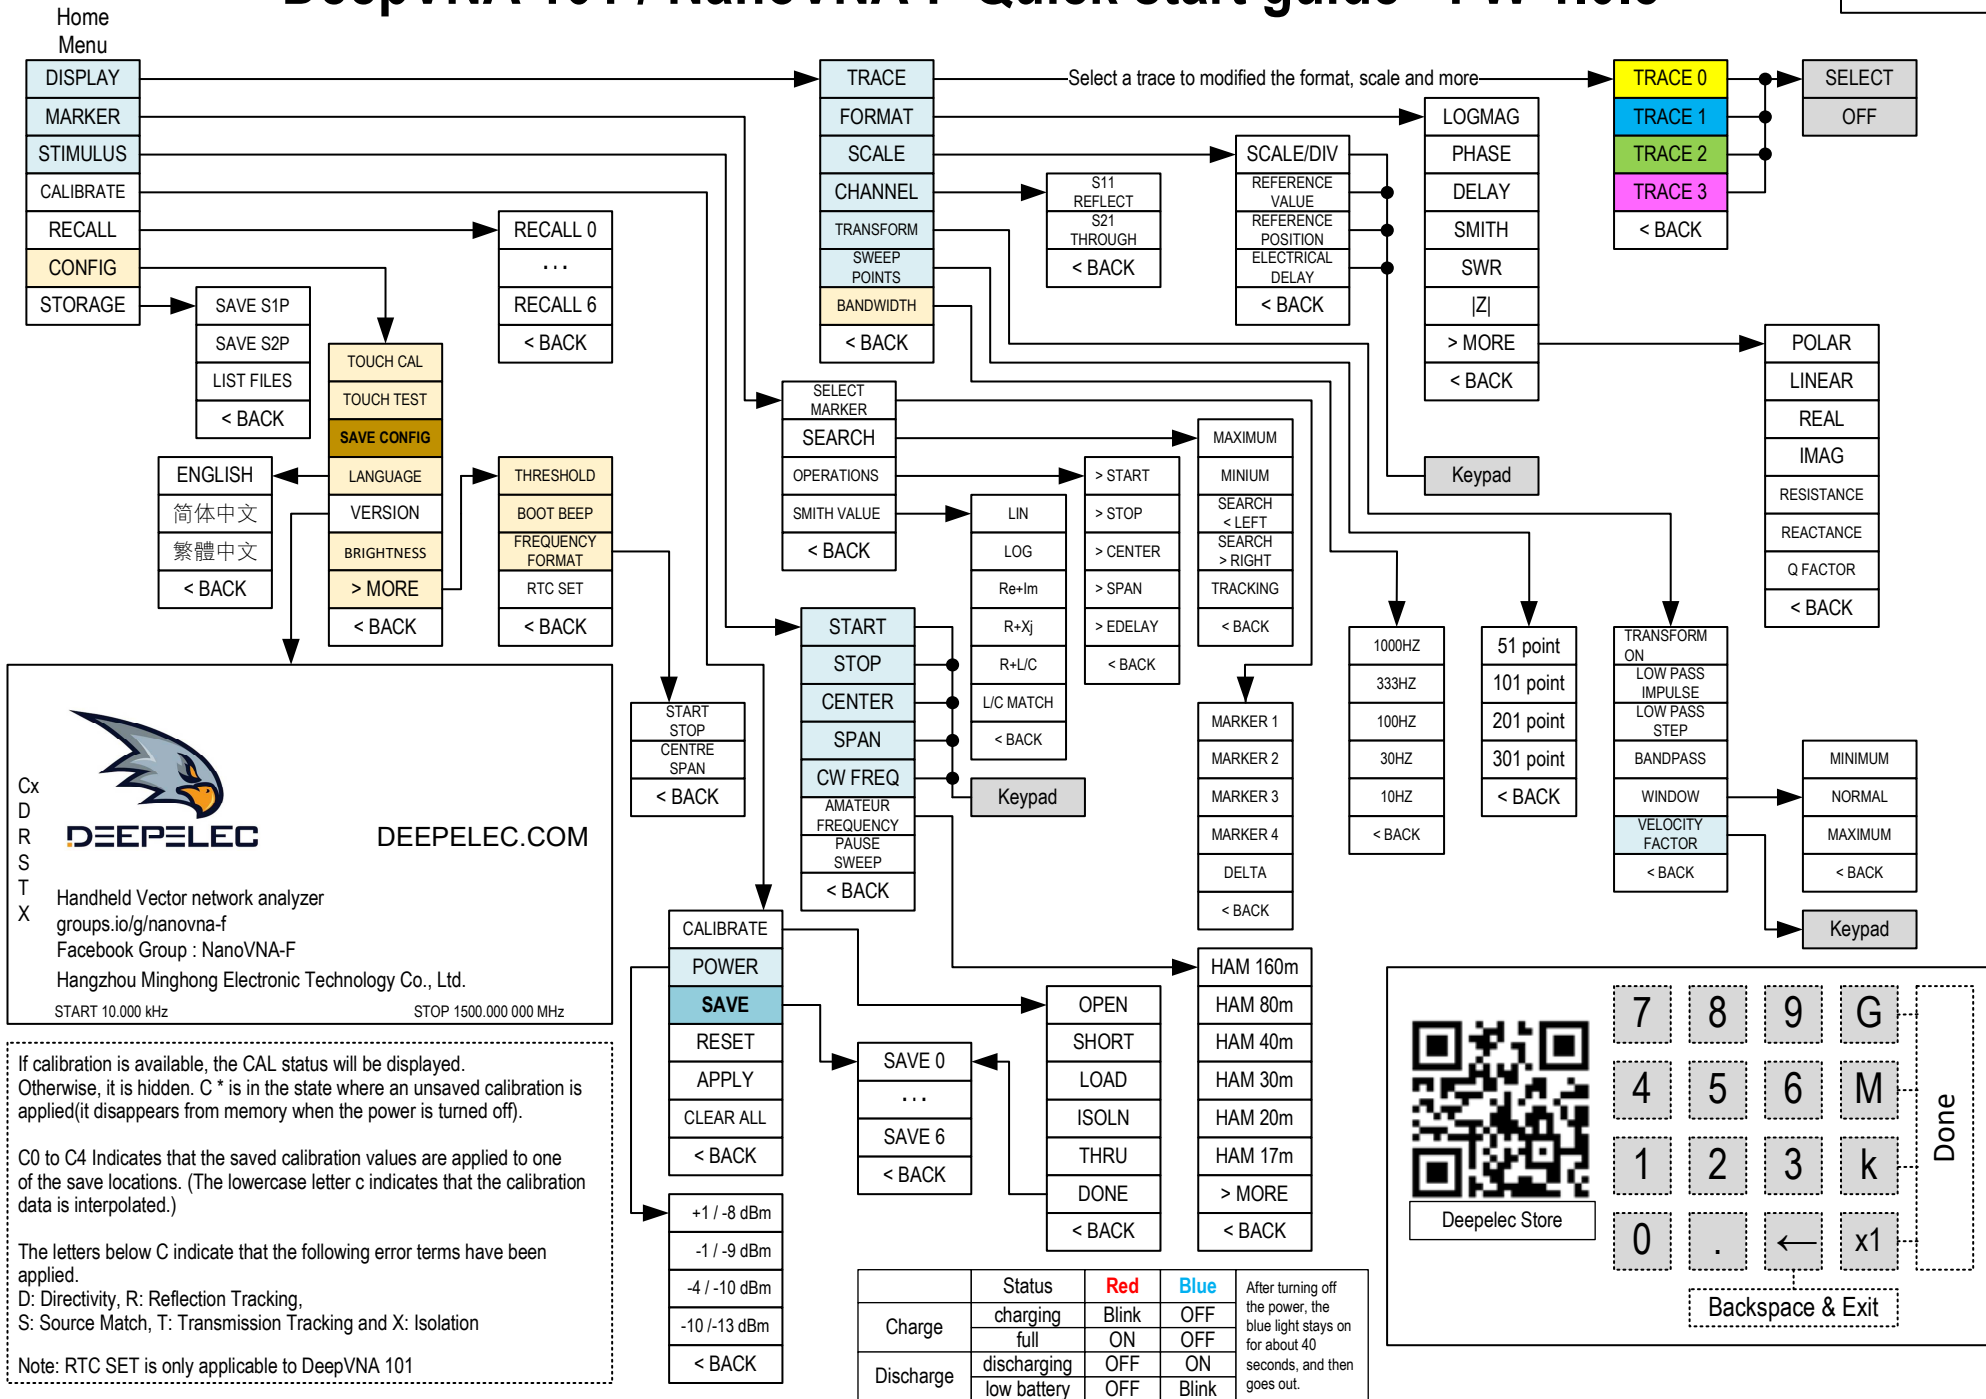

Cx  
D  
R  
S  
T  
X

**DEEPELEC** DEEPELEC.COM

Handheld Vector network analyzer  
groups.io/g/nanovna-f  
Facebook Group : NanoVNA-F  
Hangzhou Minghong Electronic Technology Co., Ltd.  
START 10.000 kHz STOP 1500.000 000 MHz

If calibration is available, the CAL status will be displayed. Otherwise, it is hidden. C \* is in the state where an unsaved calibration is applied(it disappears from memory when the power is turned off).

C0 to C4 Indicates that the saved calibration values are applied to one of the save locations. (The lowercase letter c indicates that the calibration data is interpolated.)

The letters below C indicate that the following error terms have been applied.  
D: Directivity, R: Reflection Tracking,  
S: Source Match, T: Transmission Tracking and X: Isolation

Note: RTC SET is only applicable to DeepVNA 101

	Status	Red	Blue	
Charge	charging	Blink	OFF	After turning off the power, the blue light stays on for about 40 seconds, and then goes out.
	full	ON	OFF	
Discharge	discharging	OFF	ON	
	low battery	OFF	Blink	

Deepelec Store

7	8	9	G
4	5	6	M
1	2	3	k
0	.	←	x1

Done

Backspace & Exit